

Finishes Collection 2022



Aménageur d'Espaces...

www.mbs95.com





15, rue de la Briqueterie 95330 DOMONT
Tél. 01 39 35 41 80 commercial@mbs95.com

 **LEVIRA**
INTERNATIONAL


Finishes Collection

2022

Melamine / Melamina / Laminado / Mélamines








Laminate / Estratificado / Estratificado / Stratifié






Veneer / Madeira / Madera / Bois

*on demand / sob consulta / bajo pedido / sur demande



Metal / Metal / Metal / Métal



Fabric / Tecido / Tejido / Tissu



Homestyle



Homestyle Cairo



Homestyle Dubai



Homestyle Liverpool




Homestyle Milano



Mesh / Mesh / Mailla / Maille



Striped / Listado / Listado / Listé

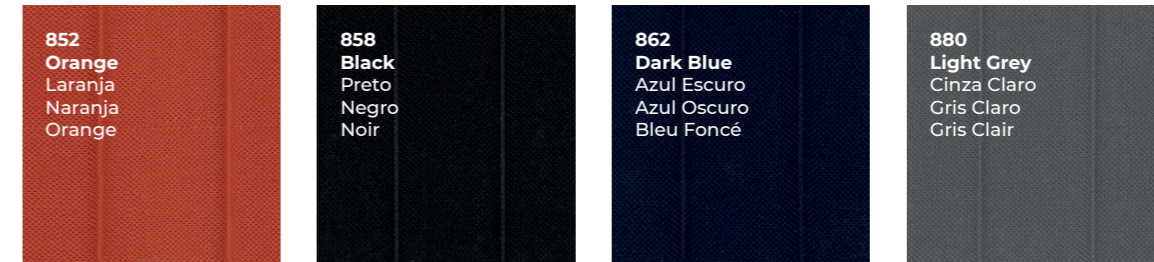

Leather / Pele / Piel / Cuir




Vinyl / Semi-pele / Semi-piel / Semi-cuir



Polypropylene / Polipropileno / Polipropileno / Polypropylène



Tambour Doors / Esteiras / Portas Persiana / Portes a Rideaux

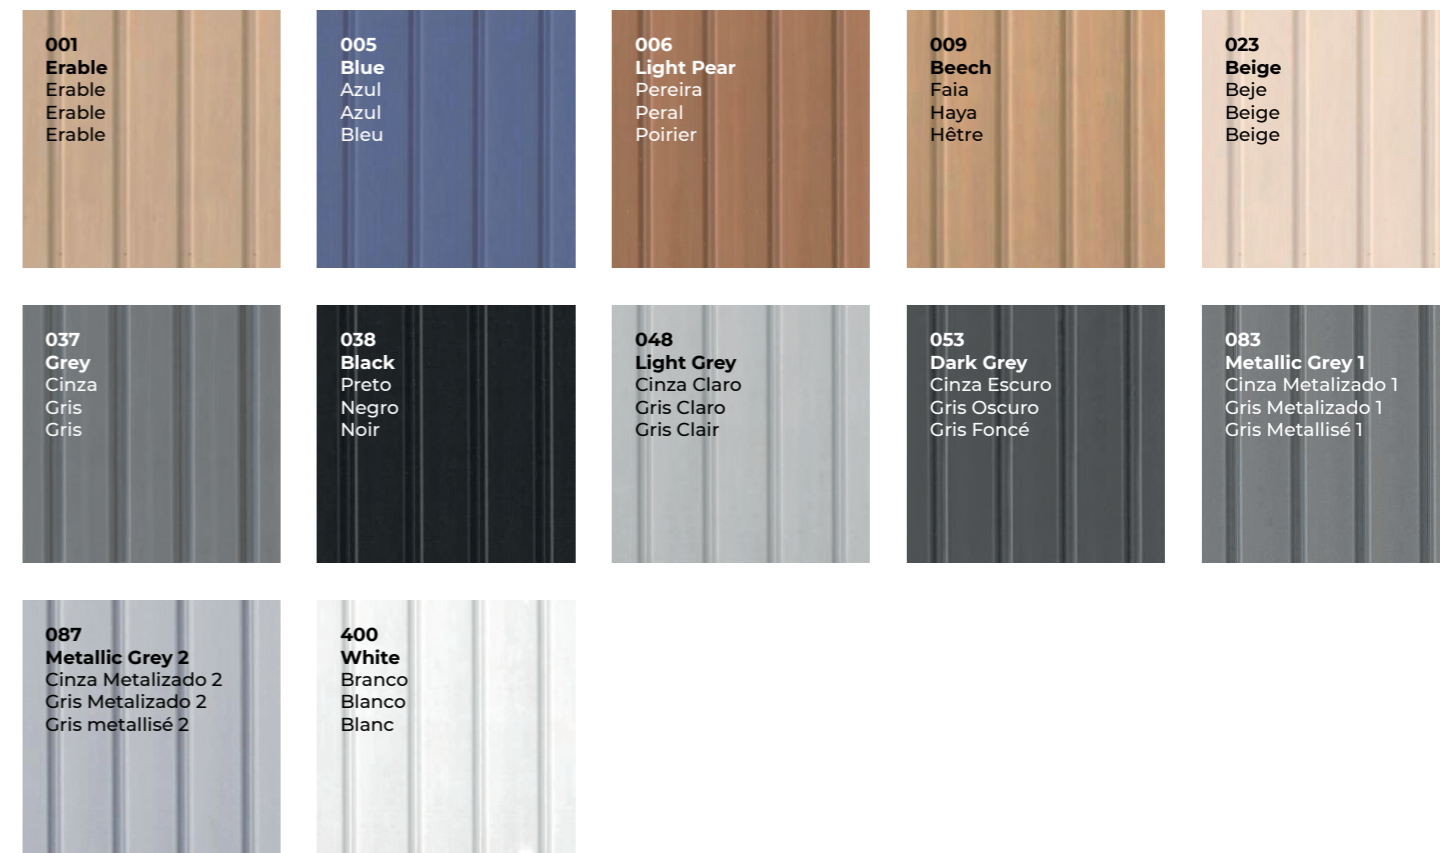

***Minimum quantities under consultation**

*Quantidades mínimas sob consulta

*Cantidades mínimas y sob consulta

*Quantités minimales sur consultation

Technical Data

Melamine / Melamina / Laminado / Méléamines

Density Kc/M3 NF EN 323	720 ±10%
Tolerance Length And Width L/I EN 324-1 Squareness	±5 mm
Tolerance EN 234-2	2 mm/m
Humidity (%) EN 322	5 to 13 %
Dry perpendicular traction (mpa) EN 319	≥0,40 . ≥ 0,35 . ≥0,35 . ≥0,30 . ≥ 0,25
Bending break. Point for all directions (mpa) EN 310	≥14 . ≥13 . ≥ 13 . ≥ 11,5 . ≥10
Elasticity for all directions (mpa) EN 310	≥ 1800 . ≥1600 . ≥ 1600 . ≥ 1500 . ≥ 1350
Screw retention value (dan) NFB 51260	≥75 . ≥70
Formaldehyde level EN 120	class 1 / ≤ 8 mg/100g
Thermal conductability coefficient	0,15 w/m°C
Fire resistance	0,8 mm/m . 0,7 mm/m
Calorific value	aprox. 4000 kcal/kg

Fabric / Tecido / Tejido / Tissu

Composition	100% Polyester
Weight	260 g/m2 (+/-5%)
Width	150cm (+/-5cm)

Homestyle Cairo

Composition	100% Polyester
Weight	460 g/lm (+/-2%)
Pilling	4/5 EN ISSO 12945-2
Fireproof norms	BS 5852 Part 1 - Cigarette Test /EN 1021-1 Cigarette Test
Colour fastness to artificial light	4 EN ISSO 105-B02
Colour fastness to rubbing	5/4 EN ISSO 105-X12
Abrasion test	>90.000 EN ISSO 12947-1,2

Homestyle Dubai

Composition	100% Polyester
Weight	435 g/lm (+/-2%)
Pilling	4/5 EN ISSO 12945-2
Fireproof norms	BS 5852 Part 1 - Cigarette Test /EN 1021-1 Cigarette Test
Colour fastness to artificial light	5 EN ISSO 105-B02
Colour fastness to rubbing	5/5 EN ISSO 105-X12
Abrasion test	>65.000 EN ISSO 12947-1,2

Homestyle Liverpool

Composition	100% Polyester
Weight	420 g/lm (+/-2%)
Pilling	4 EN ISSO 12945-2
Fireproof norms	BS 5852 Part 1 - Cigarette Test /EN 1021-1 Cigarette Test
Colour fastness to artificial light	>5 EN ISSO 105-B02
Colour fastness to rubbing	5/4-5 EN ISSO 105-X12
Abrasion test	>100.000 EN ISSO 12947-1,2

Finishes Collection

Designed to Work

Homestyle Milano

Composition	100% Polyester
Weight	435 g/lm (+/-2%)
Pilling	4-5 EN ISSO 12945-2
Fireproof norms	BS 5852 Part 1 - Cigarette Test /EN 1021-1 Cigarette Test
Colour fastness to artificial light	4-5 EN ISSO 105-B02
Colour fastness to rubbing	5/5 EN ISSO 105-X12
Abrasion test	>78.000 EN ISSO 12947-1,2

Mesh / Mesh / Mailla / Maille

Composition	100% PES
Weight	390 g/lm (+/-10mbs)
Pilling	4/5 UNE EN ISSO 12945-2:2001
Rub fastness	>25.600 cycles EN ISSO 20344:2004
Colour fastness to light	5/6 UNE EN ISSO 105-B02:2001
Colour fastness to rubbing	4/5 UNE EN ISSO 105-X12:2003

Striped / Listado / Listado / Listé

Composition	Fabric Atlantic & Foam PU
Weight	771g/lm
Width	150cm (+/-5cm)
Flame retardant	Yes

Leather / Pele / Piel / Cuir

Composition	Dyed bovine leather
Possible and normal thickness	NP 1195 0,9 - 1,5mm
Mass per volume	NP 1193 0,600 - 1,000 g/cm3
Rupture charge	IUP 6 > 8 n/mm2
Elongation at rupture (%)	IUP 6 40% - 80%
Ripping resistance	Normal: DIN53329 >150n/cm / By plate: DIN 53331 >350 n/cm
Rubbing resistance	Dry: IUF 450 > 4 degree / Wet: IUF 450 > 3 degree
Cleaning instructions	Sweat: IUF > 3 degree. Wipe with soft cloth dampened with water or use special leather cleaning solutions

Vinyl / Semi-pele / Semi-piel / Semi-cuir

Composition	60% Cotton / 15% Polyester / 25% Polyurethane
Thickness	1,40 - 1,45mm
Colour fastness	IUF 402 8 (Min 4)
Toplayer hydrolyse resistance	The original sample shows no changes in aspect, touch and pellicle adherence
Flexing resistance	120 000 flexes
Rub fastness	1000 cycles
Tensile strength (N/MN)	Warp: 21,44 / Weft: 13,96
Flexing at tear (%)	Warp: 34 / Weft: 27
Tear strength (DIN 53329) (N)	Warp: 47,4 / Weft: 37,84
Toplayer adhesion	Warp: 15,09 / Weft: 12,52
Cleaning instructions	Wipe with soft cloth dampened with water only. Do not use any cleaning solutions

Our production is continually evolving to satisfy customer requirements. Modifications and/or improvements may occur without prior notice. Colors might change due to printing processes. The omission of the trademark Levira in this catalogue is punished by law.

Levira International

A nossa produção evolui continuamente para satisfazer os interesses dos nossos clientes. A nossa fábrica reserva o direito de aplicar as modificações e/ou melhoramentos sem aviso prévio. Alteração de cores possível durante a impressão. A ocultação da marca Levira neste catalogo é penalizada por lei.

Nuestra producción evoluciona continuamente para satisfacer los intereses de nuestros clientes. Nuestra fábrica se reserva el derecho de modificar sus productos sin previo aviso. Pueden haber cambios de color debidos a la impresión. La ocultación de la marca Levira de nuestro catálogo está penada por la ley.

Notre production évolue continuellement dans l'intérêt de la clientèle. Notre usine se réserve le droit d'apporter des modifications et / ou des améliorations sans préavis. Des changements de couleurs peuvent survenir au cours de l'impression. L'omission de la marque Levira dans ce catalogue sera passible de poursuite judiciaire en conformité avec la loi.

Levira showroom and factory Oliveira do Bairro, Portugal



Aménageur d'Espaces...

www.mbs95.com

15, rue de la Briqueterie 95330 DOMONT
Tél. 01 39 35 41 80 commercial@mbs95.com



**Project coordination
and graphic design**
Baiatech

Levira International
Calle Serrano 110, Planta 1ª
28006 Madrid, España

